

Design and Development of an Oxyhydrogen Generator for Production Of brown's (Hho) Gas as Renewablesource of Fuel for the Automobile Industry

**Samuel Pamford Kojo Essuman*, Andrew Nyamful, Vincent Yao
Agbodemegbe, Seth Kofi Debrah**

*Department of Nuclear Engineering, Graduate School of Nuclear and Allied Sciences, University of Ghana.
Corresponding Author: Samuel Pamford Kojo Essuman*

ABSTRACT: *This research work seeks to design and develop an oxyhydrogen generator for HHO gas production. Key parameters considered in this study include electrode area, electrodes spacing, electrodes surface conditioning, and electrode configuration as well as the efficiency of the generator. The constructed generator consisted of 26 plates made up of 3 anodes, 3 cathodes and 20 neutral plates with each having dimension of 10cm x 10 cm. The adjacent plates was spaced at a distance of 2 mm. The efficiency of the constructed generator was evaluated using 0.01 M-0.03 M strengths of KOH at a constant voltage of 13 V. The Results showed an optimum efficiency of 11.9 % when the HHO generator was run using 0.02 M KOH at 13 V for 1 hour.*

Keywords: *HHO gas, Rectifier, Stainless Steels (ST316), Electrolyte, Rubber gasket*

Date of Submission: 05-05-2019

Date of acceptance: 20-05-2019

Highlights:

1. Designing an HHO generator
2. Development of an HHO generator
3. Determination of the efficiency of an HHO generator using KOH as a catalyst

I. Introduction

Electrolysis of water for hydrogen production has been employed industrially since the 19th century (Barton & Gammon 2010). In a typical electrolysis process, current is passed through water dosed with a calculated amount of catalyst in an electrolyser. The current supplied to the electrolyser dissociate water into hydrogen and oxygen gases which are collected together as a mixture called Brown's (HHO) gas (Afgan & Veziroghu, 2012). Industrial applications of HHO gas include; welding and cutting of metals, used as a supplementary fuel to conventional fuels to reduce the concentrations of pollutants emitted from the combustion chamber of diesel and petrol engines.

Currently, electrolysis of water is considered as a promising technique for producing a clean and sustainable source of energy as the process uses water as the main raw material to produce HHO gas without emission of pollutants into the environment (Le et al. 2010). In this regard, the production of oxyhydrogen without fossil fuel-based processes is one suitable alternative solution that can be used (Corbo et al. 2010). Electrolysis of water takes place in a reactor called oxyhydrogen generator or an electrolyser. The electrolyser basically consists of metal electrodes called anode and cathode which conduct electric current (Petrov Y. et al., 2011). These electrode plates are separated by a non-conducting material called gasket. The essence of gaskets found between the electrolyser plates ensures leakage free of electrolyte and HHO gas (Grania et al., 2007). The entire electrolyser is housed in a transparent plexi-glass sheet. Other significant auxiliary parts include a reservoir tank and a bubbler. The reservoir tank contains the electrolyte solution which feeds the generator while the bubbler serves as a safety device. This type of electrolyser is called a dry cell oxyhydrogen generator. With a wet type generator, the stacked plates without the plexi-glass cover are inserted into a container containing the electrolyte solution for the electrolytic process.

Literature survey undertaken (2014-2017) show limited research into the production of oxyhydrogen generators using metals such as platinum, gold, stainless steel plate, graphite, and lead. Other limited areas reviewed include parameters such as temperature, pressure, electrolyte type, electrode configuration and spacing, the electrical resistance of the electrolyte, electrode material, and properties, and bubble phenomena that affect the operation of an HHO generator. However, the design of oxyhydrogen generators has not been studied.

A.L. Yuvaraj, and D. Santhanaraj, 2014 did a systematic study on the electrolytic production of hydrogen gas by using graphite as an electrode. In their experiment, they connected two cylindrical rods of Stainless Steel 316 L with uniform dimensions of diameter 20 mm and length 80 mm. The electrodes were separated by 2mm and were subsequently connected to a bridge rectifier to convert AC to DC for the generator operations. In addition, Nikhil Narayan 2014 studied the performance and emission characteristics of oxyhydrogen gas on a three-cylinder four stroke petrol engine. The HHO gas electrodes were made up of SS 316 L of thickness 15 gauge wire which was spiraled and glued around a core of acrylic. The HHO generator was subsequently equipped with air bubbler adjuster and electric terminals for electricity supply as well as outlet valves. The study also used high-density polyethylene as external plate cover due to its high strength to density and non-corrosive nature. Similarly, an onboard production of hydrogen gas for power generation was studied by Nikhil. Joshi and Deepak Naik, 2015. In their study, the HHO generator was constructed using SS 316 L plate of thickness 1 mm. The electrodes were cut into dimensions of 6” by 2.5 “. The plates were then tightened together with screws and capped with PVC. The end PVC caps served as electrode terminal and passage for HHO gas outflow. Ahmad H. Sakhrieh et al., 2017 investigated the optimization of oxyhydrogen gas flow rate as a supplementary fuel in compression ignition combustion engines. In their experiment, they built the HHO generator using 316L Stainless Steel plates made up of 43 plates separated by 16 silicon gaskets. The outer ends of the arranged electrodes were covered with CPVC transparent plates. The generator was designed to achieve a voltage of 2.3 V between two successive plates by placing 5 neutral plates between every negative and positive plate. The entire set-up was completed by the addition of a reservoir tank that supplied electrolyte solution to the generator and a bubbler which condenses the water vapor that comes alongside with the HHO gas. The comparative analysis of performance characteristics of CI Engine with and without HHO Gas (Brown Gas) was evaluated by Ghulam Abbas Gohar and Hassan Raza, 2017. In this, the HHO generator was developed using 29 Stainless Steel (SS) plates. The plates were further separated with a Jain sheet with the entire reactor fitted with SS bolts and nuts.

This study therefore seeks to establish the main design principle of an HHO generator. The development, as well as other factors such as the efficiency of the generator, studied in other works would also be considered in this present work.

II. Methodology

2.1 Materials

Metal marker, metal ruler, brass metal bolts and nuts, 2mm EPDM rubber gasket, 12mm transparent acrylic sheet, two insulated copper cables, HPTE reservoir tank, PVC bubbler bottle, braided pipe hose, 90° Anderson Brass Metal Fittings, epoxy glue, carpenter glue, sandpaper of grit 40, KOH pallets, 2000 cm³ volumetric flask, and Spatula

2.2 Equipment

Metal cutting machine, drilling machine, Analytical balance and rectifier

Table 1. Specification of used metal cutting machine

Parameter	Description
Plasma model	HPR-130XD, HPR-260XD, HPR-400XD/cutting thickness up to 40 mm
Plasma height sensor	Hypertherm ArcGlide
Flame cutting system	Auto ignition/capacitive height sensor/cutting thickness 60mm
Nesting software	SIGMA NEST X1

Table 2. Specification of rectifier

Length	20cm
Width, Height	10 cm, 14 cm
Rated voltage	0 V-16 V
Rated current	0 A-13 A
Incorporated safety device	Breaker

Table 3. Specification of the used drilling machine

Parameter	Description
Spindle servo motor	Servo motor 30 HP
Spindle tapper	BT 50
Spindle rpm	200-2000 rpm
Drilling diameter capacity	6-50
Tapping capacity	M8-M30
Tool length	170-300 mm
Cooling system	Internal coolant mist & External coolant mist
ATC magazine	Stationary ATC

Chip cleaning mechanism	Standard
Chip collecting tank	Standard
Cutting dross collecting tank	Standard

2.3 Preparation of Electrolyte strength

1.12 g of KOH were placed in a clean 2 L volumetric flask containing 500 cm³ distilled water. The flask was corked and placed in a sonicator for 10 minutes. The contents in the flask was topped up with distilled water to the 2 L meniscus mark to obtain 0.01 M KOH. The flask was labeled V1 and was sonicated for additional 5 minutes to ensure homogeneity. The procedure was repeated to prepare 0.015M, 0.02M, 0.025M, and 0.03M KOH as indicated in Table 4.

Table 4.KOHstrengths

Mass of KOH (g)	Strength of KOH (M)
1.12	0.010
2.24	0.015
3.36	0.020
4.48	0.025
5.60	0.030

2.4 Designingthe oxyhydrogen generator

2.4.1 Cutting of metal electrodes

Stainless steel plate (SS) 316 L of thickness 20 gauge was selected for this experiment among platinum and nickel based on economic analysis. 26 square plates consisted of 6 electrodes and 20 neutral plates of dimensions 10 cm x 10 cm were cut out of a SS 316 L plate. Two liquid level equalization holes each of radius 3 mm were drilled in each of the 26 plates for passage of electrolyte and HHO gas. The electrode surfaceswas conditioned by rubbingitwith a coarsesandpaperof grit 40. Circular gaskets (20 No.) of diameter 5 cm was cut out of an Ethylene Propylene Diene Monomer (EPDM) rubber of thickness 1.6 mm. Two 12 cm x 12 cm x 1.2 cm high transparency acrylic sheets were cut and each was fitted with one 90° Anderson Metal Brass Hose Fitting (0.5 in Barb x 0.5 in Male Pipe) as shown in Figure 1.

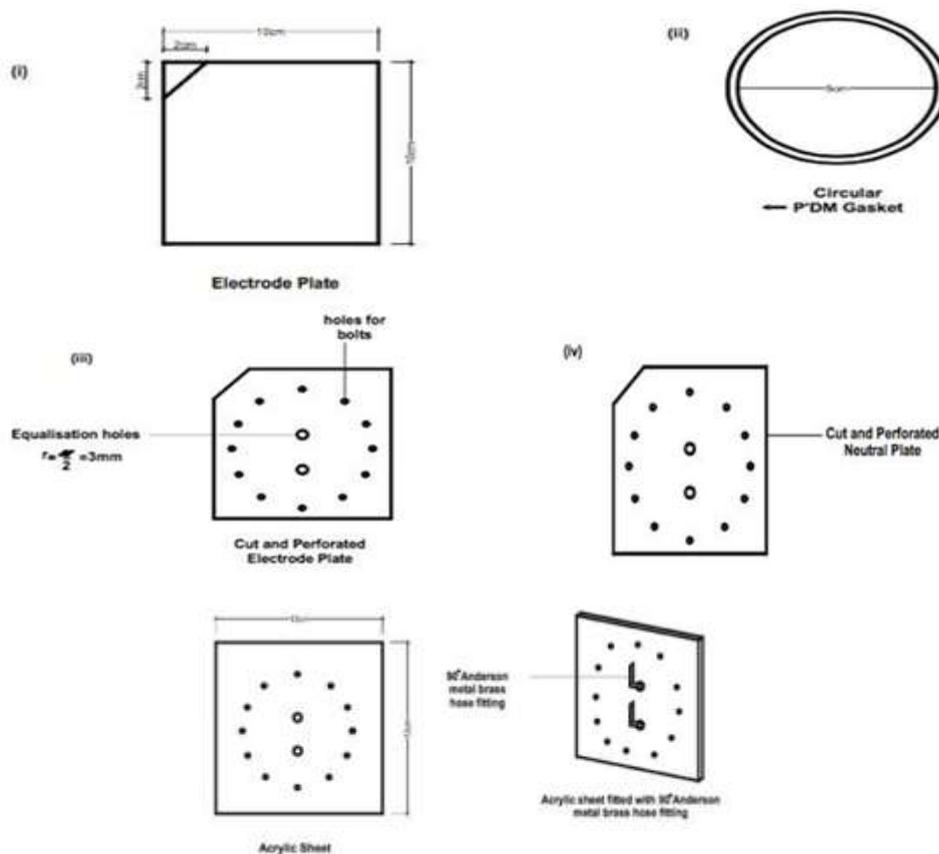


Figure 1. Cuts components of HHO generator

2.4.2 Calculating the required voltage across two successive electrode

To work within the optimal voltage range of 1.25 V to 2.7 V, four neutrals were chosen. For this experiment, a potential difference of 13 V was used. This was selected using an adjustable rectifier. The voltage between two successive plates in the constructed oxyhydrogen generator was calculated using the formula below;

$$V_n = \frac{V_0 n}{[n^2 + [(2n - q - 1)d]}$$

Where V_0 is the applied voltage supplied, n is the number of neutral plates proposed for use, d is the common difference derived from the number of plate's series and q is the correction factor given by $(n-d)$. The values of n , d , and q were derived from table 1 below.

Table 5: Deduced experimental values for calculating expected cell potential

n-value	1	2	3	n_x
d-value	1	1	1	d_x
q-value	0	1	2	q_x

The required voltage was therefore established as;

$$V_4 = \frac{13.4}{[4^2 + [(2 \times 4 - 3 - 1)1]} = 52 / 20 = 2.6 \text{ V}$$

Where, the values of n , d , and q used were 4, 1 and 3 respectively.

2.4.3 Building the oxyhydrogen generator

Figure 2 shows the step-wise arrangement used in constructing the HHO generator. Each plate was fitted with one circular rubber gasket of diameter 5 cm using carpenter's glue. To achieve the calculated 2.6 V described in section 2.4.2, the electrodes were arranged such that four neutral plates were placed between two successive electrodes to achieve a configuration of 3 anodes and 3 cathodes respectively. Each of the 12 cm x 12 cm x 1.2 cm high transparency acrylic sheets fitted with one 90° Anderson Metal Brass Hose Fitting (shown in Figure 1) was placed behind the externals of the electrodes and was tightened together using brass bolts, nuts, and washers. An auxiliary bubbler (fitted with 2 Anderson Metal Fittings) and a reservoir tank (fitted with 3 Anderson Metal Fittings) were positioned at a height above the constructed HHO generator. Finally, the fitted Anderson Elbows on the acrylic sheets and the reservoir tank were connected using braided PVC hose having inside and outside diameter of 0.25 in and 0.5 in respectively.

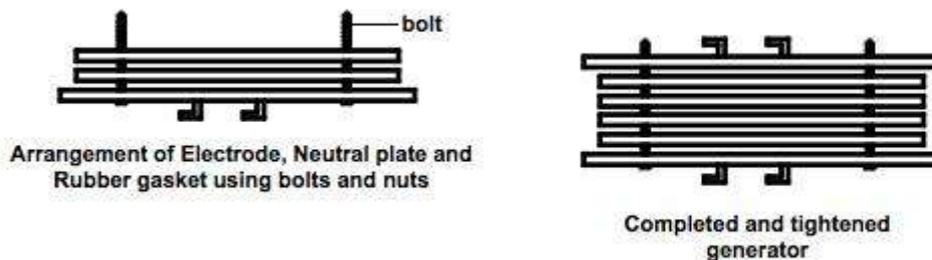


Figure 2. The step-wise arrangement of the oxyhydrogen generator electrode plates

The completed oxyhydrogen generator is shown in figure 3.



Figure 3. Front view of the oxyhydrogen generator

III. Results and Discussion

3.1 Result

Results of the investigations conducted in the present work are presented and discussed in this session.

	Description				
Concentration of KOH (M)	Ammeter reading (A)	Actual Flow rate (LPH)	Theoretical Flow rate (LPH)	Efficiency (%)	
0.030	9.68	16.416	151.88	10.8	
0.025	8.71	15.120	136.55	11.1	
0.020	6.71	12.528	105.19	11.9	
0.015	4.84	8.352	75.88	11.0	
0.010	3.74	6.048	58.63	10.3	

Table 6. The efficiency of the built oxyhydrogen generator using 0.01-0.03 M KOH run at 13V at 35 °C

3.2 Discussion

3.2.1 Calculating the efficiency of the constructed oxyhydrogen generator

According to Faraday's first law of electrolysis, the mass of a substance deposited on an electrode surface is directly proportional to the amount of current that flows through the system at Standard Temperature and Pressure (STP).

For the purpose of this experiment, this mathematically can be expressed to deduce the theoretical volume of HHO gas produced during water electrolytic process as follow;

The mass of substance deposited (m) α to the quantity of current (Q)

This implies $m = Z Q$ (1)

Where, Z is called the electrochemical equivalent (ECE) and $Q = It$.

But the ECE ($Z = M/Fv$), (2)

where 'M' is the atomic weight of the substance, v is the valency of the element and F is Faraday's constant given as 96485 C/mol.

Putting (2) into (1), gives $m = (MQ) / (Fv)$ (3)

Therefore, the mole of H₂ or O₂ deposited ($n = m/M = (Q)/Fv$) (4)

Finally, putting (4) into the Universal Gas Equation; $PV = nRT$, gives equation (5) below.

$$V = \frac{R.T.It}{F.P.Z} \quad (5)$$

$$I = 1 \text{ A}$$

Using equation 5;

$$\text{Volume of hydrogen gas produced} = [(0.0820577 \cdot 1.273 \cdot 3600) / (96485 \cdot 1.2)]$$

$$= 0.417921$$

$$\text{Volume of oxygen gas produced} = [(0.0820577 \cdot 1.273 \cdot 3600) / (96485 \cdot 1.4)]$$

$$= 0.208961$$

But total volume of HHO gas produced = produced Where: V = volume of the gas in liters, R = the ideal gas constant = 0.0820577 l*atm/ (mol*K), I = current (A), T = temperature (K), t = time (s), F = Faraday's constant = 96485 Coulombs/mol, P = ambient pressure (atm), and z = number of excess electrons (2 for H₂ and 4 for O₂).

Therefore, at Standard Temperature and Pressure (STP), considering that the oxyhydrogen generator built in this experiment was run for one hour at 1 A current then;

$$T = 0^\circ\text{C} = 273 \text{ K}$$

$$p = 1 \text{ atm}$$

$$t = 3600 \text{ s}$$

hydrogen gas + produced oxygen gas

$$\text{Given total volume of HHO gas produced} = 0.417921 + 0.208961$$

$$= 0.626882$$

This therefore, corresponds to 0.627 l / hour / Ampere

However, in the experiment using 0.03 M KOH at a voltage of 13V, generated current = 9.68A, time = 50 s, the volume of HHO gas produced = 228 cm³.

Hence the flow rate for the produced HHO gas = (Volume of HHO gas)/time

$$= (228/50) \times 3.6 = 16.416 \text{ LPH}$$

Subsequently, the theoretical volume of HHO gas produced using 25 cells and current of 9.68A at 32°C gives;

$$\text{Theoretical volume} = 0.6271 \times 9.68 \times 25 \times 0.895082 \times 1.1172 = 151.88 \text{ liters per hour}$$

Therefore, the efficiency of the constructed HHO generator is given by;

$$(\text{Actual HHO gas produced}) / (\text{Theoretical volume of HHO gas produced})$$

$$= (16.416) / (151.88)$$

$$= 10.8 \%$$

In a similar work, Munther Issa Kandah investigated on the enhancement of water electrolyser efficiency in 2014. In his study, the HHO generator was constructed from 22 SS 316 L plate made up of 4 cathodes, 4 anodes and 14 neutrals each of dimension of 17 x 15 cm². The efficiency of the built generator was found to be 62.92 %. The difference in values (that is between 10.8% and 62.92%) could be attributed to the differences in electrode area and the number of anodes and cathodes used in the present study. This is because operating with smaller electrode area increases the electrical resistance of the system. This increased the system resistivity and the rate of heat dissipation resulting in the decrease in the efficiency value of the HHO generator constructed. In addition, the decrease in the number of electrodes (anodes and cathodes) also decreased the effective surface for oxidation and reduction reactions which produced lower volumes of HHO gas given an indication of the lower efficiency observed.

IV. Conclusion

The design and development of an oxyhydrogen generator for production of HHO gas was studied. The generator was constructed using Stainless Steel plate 316 L made up of 3 anodes, 3 cathodes, and 20 neutral plates. Results obtained reported an optimum efficiency of 11.9 % when the oxyhydrogen generator was run at 13 V for 1 hour using 0.02 M KOH solution.

Acknowledgment

I will like to acknowledge Miss Catherine Kuamoah, Miss Hephzibah Ewuradjoa Pamford Essuman, Mr. Cephas Kwaku Hammond, Mr. Kwadwo Asamoah Manu, Mr. Agyekum Fred Asante, Mr. Kwame Adum Kwapong, and Mr. Cis Crabbe for their immense support that ensured the successful completion of this study.

References

- [1]. Afgan, N. & Veziroglu, A. (2012), "Sustainable resilience of hydrogen energy system", *Int. J. Hydrogen Energy* 37, 5461-5467.
- [2]. Barton, J. & Gammon, R. (2010), "The production of hydrogen fuel from renewable sources and its role in grid operation", *J. Power Sources* 195, 8222-8235.
- [3]. Corbo, P., Migliardini, F. & Veneri, O. (2010), "Lithium polymer batteries and proton exchange membrane fuel cells as energy sources in hydrogen electric vehicles", *J Power Sources* 195, 7849-7854.
- [4]. Grami'a, LM., Oroz, R., Ursu'a, A., Sanchis, P. & Die'guez, PM. (2007), "Renewable hydrogen production: performance of an alkaline water electrolyzer working under emulated wind conditions", *Energy Fuels* 21., 1699- 1706.
- [5]. Lee, JW., Hawkin, B., Day, DM. & Reicosky, DC. (2010), "Sustainability: the capacity of smokeless biomass pyrolysis for energy production, global carbon capture and sequestration", *Energy Environ. Sci.* 3, 1695-1705.
- [6]. Petrov, Y., Schosger, J-P. Stroynov, Z. & DeBruijn, F. (2011) "Hydrogen evolution on nickel electrode in synthetic tap water

- alkaline solution”, International Journal of Hydrogen Energy 36(20), 12715-12724.
- [7]. Ahmad H. Sakhrieh, Ahmad N. Al-Hares, Fawaz A. Faqes, Adel S. Al Baqain, Nizar H. Alrafie, 2017. Optimization of oxyhydrogen gas flow rate as a supplementary fuel in compression ignition combustion engines. Department of Mechanical and Industrial Engineering, American University of Ras Al Khaimah, 10021, UAE
- [8]. Nikhil Joshi and Deepak Naik, 2015. Onboard Production of Hydrogen Gas for Power Generation. Quest Journals Journal of Research in Mechanical Engineering Volume 2 ~ Issue 6 (2015) pp: 01-11 ISSN(Online) : 2321-8185 www.questjournals.org
- [9]. Munther Issa Kandah, 2014. Enhancement of Water Electrolyzer Efficiency. Journal of Energy Technologies and Policy www.iiste.org . ISSN 2224-3232 (Paper) ISSN 2225-0573 (Online). Vol.4, No.11, 2014
- [10]. A.L. Yuvaraja and D. Santhanaraj, 2014. A Systematic Study on Electrolytic Production of Hydrogen Gas by Using Graphite as Electrode. Materials Research. 2014; 17(1): 83-87 © 2014 DOI: <http://dx.doi.org/10.1590/S1516-14392013005000153>
- [11]. Ghulam Abbas Gohar and Hassan Raza, 2017. Comparative Analysis of Performance Characteristics of CI Engine with and without HHO Gas (Brown Gas). Department of Mechanical Engineering, COMSATS Institute of Information Technology, Sahiwal, Pakistan
- [12]. Nikhil Narayan, Vanangamudi, P. Naveenchandran, 2014. Performance and Emission Characteristics of OxyHydrogen Gas on a Three Cylinder Four Stroke Petrol Engine. PG student, Department of Automobile Engineering, Bharath Institute of Science and Technology, Bharath University, Chennai, India

Samuel Pamford Kojo Essuman " Design and Development of an Oxyhydrogen Generator for Production Of brown's (Hho) Gas as Renewable source of Fuel for the Automobile Industry" International Journal of Engineering Science Invention (IJESI), Vol. 08, No. 05, 2019, PP 69-75